



WOOLUBE OZSPRAY

HEAVY DUTY LIQUID LANOLIN



Environmentally Friendly

Non Evaporative Film

Non Toxic Film

Long Term Protection

Non Flammable Film

Non Conductive to 70kv

Woolube Ozspray Heavy Duty is a thick sprayable form of Woolube Grease which dries to a heavy duty grease film offering the same characteristics as the grease for more robust applications, as well as being an excellent fluid displacement, penetrant and lubricant in one multi purpose product.

TYPICAL APPLICATIONS

RUST PROOFS AND PROTECTS

Woolube Ozspray Heavy Duty is a special formula for **HEAVY DUTY** applications, e.g. Steel Formwork, Heavy Machinery, Wire Cable, Car Rust Proofing, Boat Trailer Springs, Forklift Chains etc.

WOOLUBE OZSPRAY HEAVY DUTY:

- Lubricates and protects moving parts
- Displaces and repels moisture
- Can be used on electrical fittings, Non conductive to 70kv
- Excellent for use in highly corrosive environments
- Is a cheap, cost effective and reliable cable pulling fluid
- Out performs most other anti-seize products
- Perfect for Wire rope and all industrial chains, d shackles

AVAILABLE IN:

- 750ml Trigger Spray OZE750mL
- 1 Litre Jerry OZE1L
- 5 Litre Jerry OZE5L
- 20 Litre Drum OZE20L
- 200 Litre Drum OZE200L



Designed by Nature



WOOLUBE OZSPRAY

HEAVY DUTY LIQUID LANOLIN

APPLICATION GUIDE

- Lightly shake container before use.
- Woolube Ozspray Heavy Duty can be applied using a weed sprayer, brush or lambs wool applicator.
- When applying, hold 30cm away from object and apply as required.
- When applying to wire rope, apply a light coat around the circumference of the rope, or if possible submerge rope in a bath of Woolube Ozspray Heavy Duty Lanolin.
- For chains, spray onto chain for one rotation only, excessive application will cause a tacky finish
- For agricultural spray units, clean unit, then apply using a weed sprayer. For maximum protection throughout the season, wash dust/dirt off of unit and re-apply Woolube Ozspray Heavy Duty every 2-3 weeks.
- When using Woolube Ozspray Heavy Duty allow up to 90 minutes drying time for best results.
- For use as a cable pulling fluid, spray Woolube Ozspray Heavy Duty (using a weed sprayer) directly on the cable as it is leave the spool, any excess lanolin will fall back onto the spool and reduce wastage.

6 Month Environmental Exposure Result




Designed by Nature



WOOLUBE OZSPRAY

HEAVY DUTY LIQUID LANOLIN

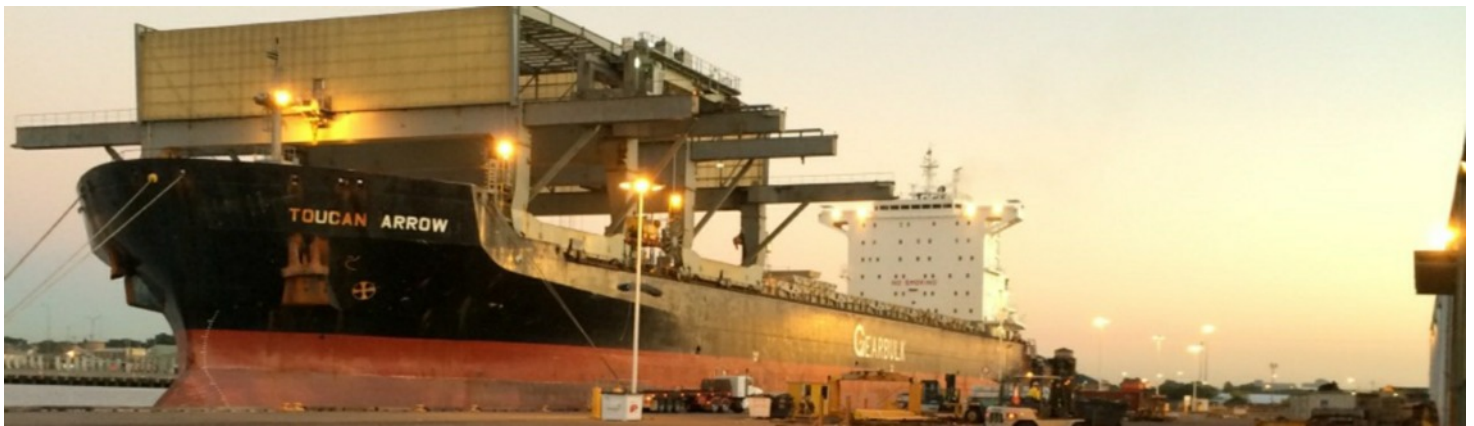

TESTING

- Woolube Ozspray Heavy Duty has been tested by independent NATA certified Laboratories using:

Australian Standard Test Methods:

- AS 1580.460.2-Resistance to Acid & Alkali - Good acid Resistance.
- AS 2380 Clause 4.2 - Flameproof enclosure - Complies with standard.

Other Testing:

- High Voltage Testing (Energex) - dry tested to 70kv - non conductive
- Chemical Analysis (ERTS) - contains no heavy metals

WOOLUBE LANOLIN PRODUCTS

E: info@woolube.com.au
PO Box 167
Berowra Heights
NSW 2082, Australia
PH: 1300 664 663

APPROVALS

- HACCP Australian Food Safety Accreditation Systems - Food Grade Lubricant

PHYSICAL PROPERTIES

- Appearance : Amber liquid
- Fragrance: Light wool fleece odour

STORAGE AND TRANSPORT

- Keep in a dry, cool well ventilated place
- Keep out of reach of children

Designed by Nature